

# Impulse

## Product Specifications

ITEM NO: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
DATE: \_\_\_\_\_

### Non-Refrigerated Service/Self-Service Countertop Case - Straight Front

- ☐ CGS2830  
☐ CGS3830

Lengths include end panels  
28-1/8"L x 25"D x 30-5/8"H  
38-1/8"L x 25"D x 30-5/8"H



MODEL SHOWN:  
CGS2830 SERVICE



MODEL SHOWN:  
CGS2830 SELF-SERVICE

#### STANDARD FEATURES

- Clear glass rear swinging doors w/o lock
- Designed for service or self-service applications
- Glass end
- LED 3500K top & shelf lights
- One year parts & labor warranty
- Shelving removable and adjustable on 1" centers

Features	Standard	Options
INTERIOR / EXTERIOR COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
ELECTRICAL CONNECT	<input type="checkbox"/> 6' straight blade power cord	<input type="checkbox"/> Electrical leads (non-refrigerated)
MISCELLANEOUS		<input type="checkbox"/> Second year parts & labor warranty


# Impulse

## Product Specifications


<b>Intended Environment:</b> Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
<b>Zone</b>	<b>Intended Product To Be Displayed</b>	<b>Warmest Avg Prod Temp ° F</b>
1	Packaged non-refrigerated products	Ambient

PLAN VIEW

SIDE VIEW

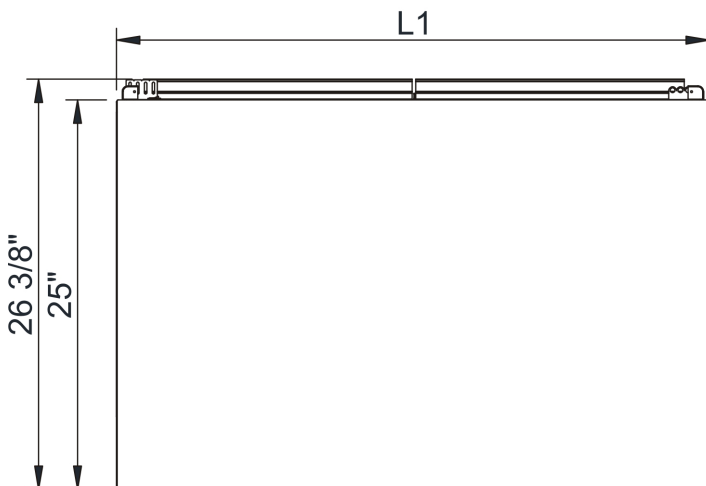

CASE FRONT

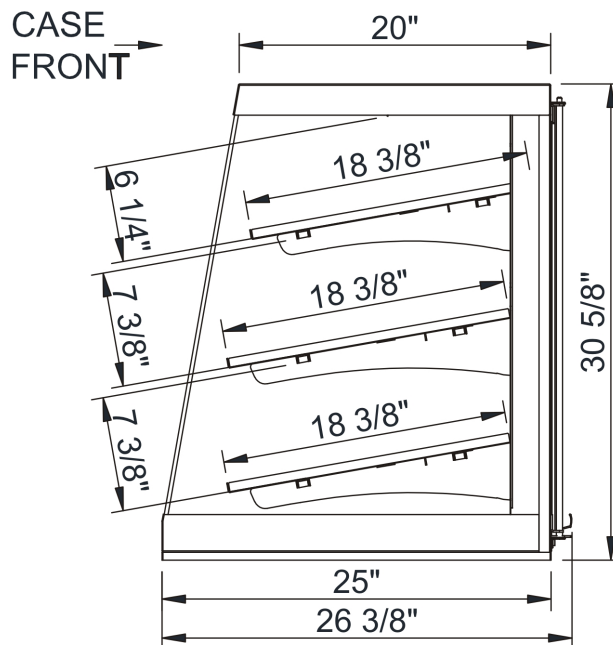

NOTE: ALL DIMENSIONS APPROXIMATE

⊕ ELECTRICAL JUNCTION BOX  
(SUPPLIED WITH 6" LEADS OR POWER CORD).  
⊗ LOCATION OF DRAIN TUBE FOR REMOTE REF.  
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.  
⊗ REMOTE FLOOR SINK & UTILITIES  
ACCESS AREA.

⊕ SELF-CONTAINED CASE SERVICE ACCESS AREA.  
⊗ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
CGS2830	N/A	28.13	.00	Ambient	Circuit #1	110-120	1	60	0.40	51	2+G	5-15P	N/A	N/A	N/A	300
CGS3830	N/A	38.13	.00	Ambient	Circuit #1	110-120	1	60	0.56	75	2+G	5-15P	N/A	N/A	N/A	350

\*\*\* Does not include electric defrost on freezer models.

### Important Notes:

1) Electrical Note: If GFCI is required, a GFCI breaker Must be used in lieu of a GFCI receptacle.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### Regulatory Approvals:

All Models ETL Listed to UL 65  
ETL Sanitation to NSF 2

