

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

BOTTOM MOUNT REACH-IN REFRIGERATORS

MODEL: RB72HC-1G

RB72HC Glass Door Reach-In Refrigerator Hydrocarbon Series



CABINET CONSTRUCTION

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

- Stainless steel front, painted gray sides
- Aluminum interior, gray painted interior
- Full electronic control
- LED lighting standard
- Anti-microbial door handles
- Self-closing doors, 120° stay open door feature with cartridge style hinges
- One –piece grille allow easy removal/installation for preventative maintenance
- Nine (9) heavy duty epoxy coated wire shelves standard
- 6" Caster with (2) brakes standard
- Maintains product temperatures between 36°-38° F

RB72HC-1G

OPTIONS & ACCESSORIES

- Stainless steel universal tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (AC)
- Epoxy shelves
- Shelf clips
- □ 3" caster or 6" legs
- □ Door locks
- Remote option

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- · Automatic, non-electric defrost
- Epoxy coated evaporator coil
















3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com sales@bevair.com



MODEL	RB72HC-1G
EXTERNAL DIMENSIONAL DATA	
Width Overall	75"
Depth Overall with Handle	33 1/2"
Height Overall	84 1/4"
Number of Doors	3
Depth with Door Open 90°	55"
Door Opening (in)	21 5/8" x 52 5/8"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	68.93
Internal Width Overall (in)	72"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	61 5/8"
Internal Height Useable (in)	53"
Number of Shelves	9
ELECTRICAL DATA	
Full Load Amperes 115/60/1	6.2
REFRIGERATION DATA	
Horsepower	1/2
Capacity (BTU/Hr)*	2808
WEIGHT DATA	
Gross Weight (Crated lbs)	732 lbs
Height - Crated	85"
Width - Crated	77"
Depth - Crated	36"

Vista Series Bottom Mount Reach-in Refrigerator

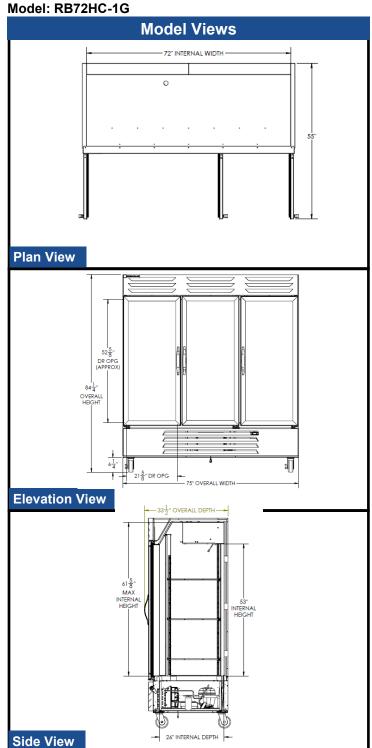

ELECTRICAL CONNECTION

















Units pre-wired at factory and include 8' long cord and plug set.



