

ITEM NO:	
PROJECT:	
DATE:	

# **Refrigerated Self-Service Case**



	Lengths include end panels			
□ NR3655RSSV	35-3/4"L x 33"D x 54-5/8"H			
□ NR4855RSSV	47-3/4"L x 33"D x 54-5/8"H			
□ NR6055RSSV	59-3/4"L x 33"D x 54-5/8"H			
□ NR7255RSSV	71-3/4"L x 33"D x 54-5/8"H			

### STANDARD FEATURES

- NOTE: Contact Factory for lead time
- NOTE: Glass warranty only applicable to first point of delivery
- Breeze~E (Type-II) w/ EnergyWise s/c refrigeration
- (3) Levels of clear glass shelving removable and adjustable on 1" centers
- Blue Fin coated coil
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Condensate pan (self-contained refrig. only)
- Integrated average product temperature of 40°F or less
- LED top & shelf lights
- One piece formed ABS plastic tub
- One year parts & labor: 5 year compressor warranty

■ One year parts & labor; 5 year compressor warranty							
Features	Standard	Options					
EXTERIOR COLOR	□ Black	□ Painted (non-stock colors, specify RAL#) □ Painted (stock colors, specify RAL#) □ Stainless steel					
INTERIOR COLOR	□ Black	<ul> <li>□ NOTE: Interior color must be FDA &amp; NSF approved</li> <li>□ Painted (stock colors, specify RAL#)</li> <li>□ Stainless steel</li> </ul>					
PANEL EXTERIOR	<ul> <li>Laminated (non-premium) Confirm pattern/grain direction</li> </ul>	<ul> <li>Laminated (premium) Confirm pattern/grain direction</li> <li>Stainless steel</li> </ul>					
BASE SUPPORT	<ul> <li>Adjustable, locking casters (n/a w/ remote ref.)</li> </ul>	<ul><li>□ 6"H stainless steel legs</li><li>□ Shims (standard w/ remote)</li></ul>					
END PANEL LEFT	□ Full end panel	□ No end panel w/ synchronized defrost					
END PANEL RIGHT	□ Full end panel	□ No end panel w/ synchronized defrost					
LOWER FRONT PANEL	□ Black	<ul><li>□ Painted (stock colors, specify RAL#)</li><li>□ Stainless steel</li></ul>					
LOWER REAR PANEL	□ Black	<ul><li>□ Painted (stock colors, specify RAL#)</li><li>□ Stainless steel</li></ul>					
UPPER REAR	□ Solid back panel	<ul><li>Clear glass rear sliding doors</li><li>Reflective glass rear sliding doors</li></ul>					
LIGHTS	□ LED 3500K w/ frosted lens	<ul><li>□ LED 3000K w/ frosted lens</li><li>□ LED 4000K w/ frosted lens</li></ul>					
ELECTRICAL CONNECT	<ul><li>6' straight blade power cord (self-cont.)</li></ul>	<ul><li>6' locking power cord (self-cont.)</li><li>Electrical leads (remote)</li></ul>					
REFRIGERATION	□ Breeze~E (Type-II) w/ EnergyWise s/c refrigeration (rear access)	<ul> <li>□ Breeze~E (Type-II) w/ EnergyWise s/c refrigeration (front access)</li> <li>□ NOTE: Remote only available w/base w/shims</li> <li>□ Remote w/thermostat, solenoid &amp; TXV (front access)</li> <li>□ Remote w/thermostat, solenoid &amp; TXV (rear access)</li> </ul>					
MISCELLANEOUS		<ul> <li>Rear door lock</li> <li>Second year parts &amp; labor warranty (excludes compressor)</li> </ul>					
ACCESSORIES		<ul> <li>4"D full chimney rear wall spacer (front access only)</li> <li>4"D open rear wall spacer (front access only)</li> <li>Clean Sweep® coil cleaner (n/a w/remote)</li> <li>Clear acrylic security cover, removable, locking</li> <li>Night curtain, retractable, non-locking</li> </ul>					



Zone

Intended Product To Be Displayed


Packaged refrigerated products

Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 60% relative humidity unless noted otherwise in system information below

Warmest Avg Prod Temp ° F

#### PLAN VIEW

## SIDE VIEW

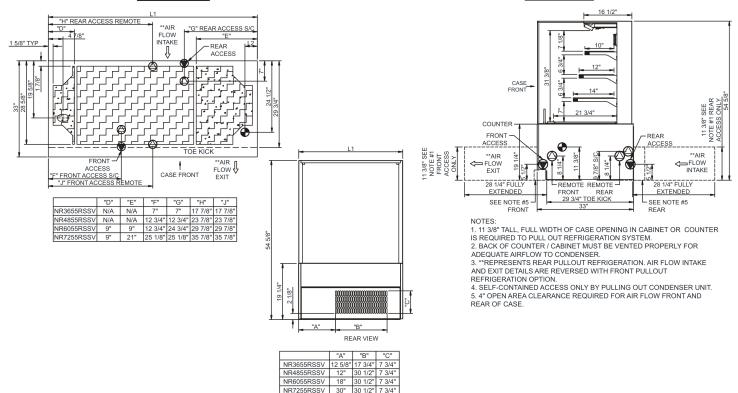

NOTE: ALL DIMENSIONS APPROXIMATE

■ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
 ■ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 34" OR 1½" PVC TUBE).

REFRIGERATION LINE CONNECTION.

REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

SELF-CONTAINED CASE SERVICE ACCESS AREA.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Ci	rcuit Volts		Phs	Freq	Amps	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
NR3655RSSV	N/A	35.75	4.13	Remote(Type II)	Circuit #1	110-120	1	60	1.20	54	2+G	Leads Single	20.00	3650	3380	750
				Self-Contained	Circuit #1	110-120	1	60	16.00	1,187	2+G	5-20P or L5-20P	N/A	N/A	N/A	
NR4855RSSV	N/A	47.75	4.13	Remote(Type II)	Circuit #1	110-120	1	60	1.56	82	2+G	Leads Single	20.00	4838	4480	950
				Self-Contained	Circuit #1	208-240	1	60	11.11	1,629	2+G	6-15P or L6-15P	N/A	N/A	N/A	
NR6055RSSV	N/A	59.75	4.13	Remote(Type II)	Circuit #1	110-120	1	60	1.60	71	2+G	Leads Single	20.00	6026	5580	1,000
				Self-Contained	Circuit #1	208-240	1	60	12.00	1,896	2+G	6-15P or L6-15P	N/A	N/A	N/A	
NR7255RSSV	N/A	71.75	4.13	Remote(Type II)	Circuit #1	110-120	1	60	1.34	65	2+G	Leads Single	20.00	7193	6660	1,100
				Self-Contained	Circuit #1	208-240	1	60	12.00	1,908	2+G	6-15P or L6-15P	N/A	N/A	N/A	

\*\*\* Does not include electric defrost on freezer models

Regu	latory	Appro	ovals:

All Models Accordance with AHRI Std 1200 ETL Listed to UL 471

ETL Listed to CAN/CSA 22.2 No. 120

ETL Sanitation to NSF 7







#### **Important Notes:**

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Back side of counter must be open or vented the full length of the unit to allow proper ventilation for the refrigeration system.
- 3) Glass warranty only applicable to first point of delivery.

MARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.