



MODELS

KGH-ES-(30, 40, 50, 60, 80,100)-S

GRAB-N-GO HIGH PROFILE CASE WITH ELECTRIC SHUTTER

CASE HOLDS 36°F TO 40°F • KEY OPERATED ELECTRIC LOCKING SHUTTER
FORCED AIR REFRIGERATION • OPEN FRONT
FRONT LOADING • LED LIGHTING IN CANOPY AND UNDER SHELVES



AUTODESK®
REVIT®


SELF CONTAINED	Model	Width (inches)	Capacity FT ³	Electrical					Weight lbs		Crate Size (inches)			
				Compressor			Total Amps 115V	Amps 230 V	DWTg[dW : SdV] [dW : SdV] [dW : SdV]	Net Weight	Ship Weight	L"	W"	H"
				H.P	F.L.A 115V	F.L.A 230V								
	KGH-ES-30-S	29.2	15.9	3/4	16.0	N/A	20.7	N/A	1x 115V	417	527	32	32.5	92
	KGH-ES-40-S	41	23.3	1	16.2	N/A	26.3	N/A	1x 115V	509	653	44	32.5	92
	KGH-ES-50-S	50.2	29.1	1	16.2	N/A	27.0	N/A	1x 115V	564	736	53	32.5	92
	KGH-ES-60-S	60.6	35.6	1-1/4	N/A	9.2	10.8	9.2	1x 115V + 1x 220V	666	842	64	32.5	92
	KGH-ES-80-S	78.2	46.6	2 x 1	N/A	2 x 8.2	11.2	16.4	1x 115V + 1x 220V	811	1062	82	32.5	92
	KGH-ES-100-S	96.6	58.2	2 x 1	2 x 16.2	N/A	21.5	16.4	1x 115V + 1x 220V	1047	1444	99.6	32.5	92

STANDARD FEATURES

- Key operated electric shutter
- Tempered side glass
- CFC free injected foam insulation
- Silver colored PVC coated steel front panel
- PVC coated steel gray interior
- PVC coated dark gray anthracite kick plate
- Foamed PVC coated steel black end panels
- Height adjustable shelves can be tilted
- Products stop on all shelves
- Temperature and defrost regulated by a digital controller
- Removable condensate evaporating pan for easy cleaning
- Slide out condensing unit
- Digital thermometer
- Levelling feet

OPTIONAL FEATURES

- Stainless steel interior and / or exterior
- Other colors available
- Solid or full view end panels
- Additional shelves
- Partition and or / product dividers
- Price tag molding
- Casters add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

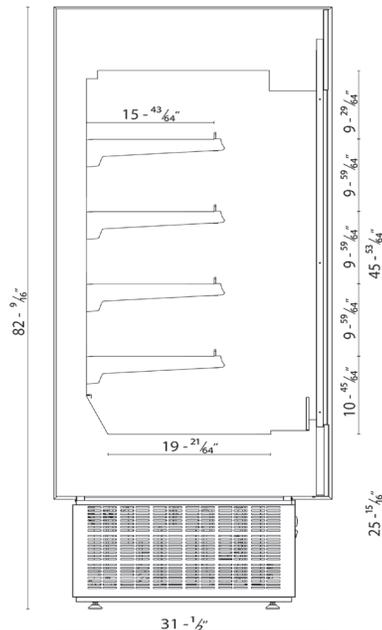

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient).

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)



3560 NW 56th St
Fort Lauderdale, FL USA 33309
Tel: 786.600.4687 / Toll Free: 844.218.8477 / Fax: 786.661.4100



5659 Royalmount Ave.
Montreal, QC, Canada H4P 2P9
Tel: 514.737.9701 / Toll Free: 888.275.4538 / Fax: 514.342.3854
Toll free: 877.453.8832
sales@mvpgroupcorp.com / mvpgroupcorp.com



Hydra - Kool is a registered trademark of MVP Group Corp.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE