

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

UCR UNDERCOUNTER

UCR41AHC Undercounter Refrigerator Hydrocarbon Series MODELS: UCR41AHC



3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, door, (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on cam-lift hinges
- Easy door removal for service and cleaning
- Magnetic gasket attached to each door for positive seal
- Painted aluminum door handle
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves standard
- Field reversible door
- Maintains product temperature between 36°F and 38°F

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil

OPTIONS & ACCESSORIES

- □ Stainless steel back and grille
- Stainless steel interior
- ☐ Right or left hinged door
- □ Locks (solid doors only)
- □ Bun rack
- ☐ Wire shelf divider
- ☐ Thermometer digital or stem type dial
- ☐ 3" Casters or 6" legs
- □ Low profile casters
- Remote option


















MODEL	UCR41AHC
EXTERNAL DIMENSIONAL DATA	
Width Overall	41"
Depth Overall	32 7/8"
Height Overall with 6" casters	34 1/2"
Number of Doors	1
Depth with Door Open 90	57"
Door Opening (in)	21 5/8" x 23 1/2"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	7.94
Internal Width Overall (in)	37"
Internal Width Useable (in)	22"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	25"
Number of Shelves	2
ELECTRICAL DATA	
Full Load Amperes 115/60/1	3.0
REFRIGERATION DATA	
Horsepower	1/4
Capacity (BTU/Hr)*	1350
WEIGHT DATA	
Gross Weight (Crated lbs)	261 lbs
Height - Crated	40"
Width - Crated	44"
Depth - Crated	37"

Undercounter Refrigerators Models: UCR41AHC

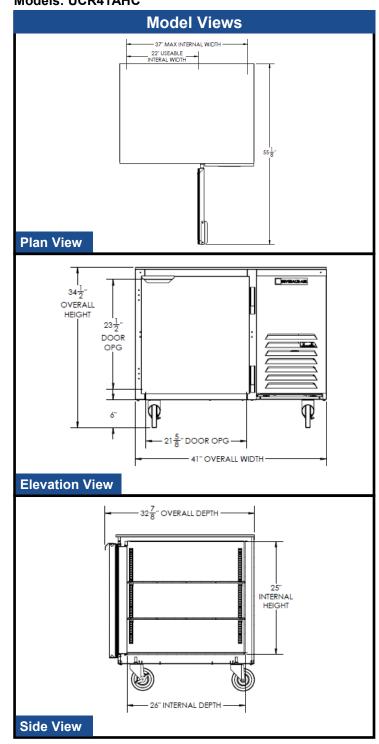

ELECTRICAL CONNECTION



115/60/1 NEMA-5-15P

Units pre-wired at factory and include 8' long cord and plug set.















