

# 1415 Countertop Electric Deck Oven



## **OPTIONS AND ACCESSORIES**

(AT ADDITIONAL CHARGE)

- Stacking kit
- ☐ 4" legs with adjustable sanitary feet

Project			
Item No			
Quantity _			

Ovens consist of basic sections and are a complete and separate unit capable of operating alone or in combination.

All data is shown per oven section, unless otherwise indicated.

Refer to operator manual specification chart for listed model names.

# **EXTERIOR CONSTRUCTION**

- Stainless steel front, top and sides
- Aluminized steel back and bottom
- Drop down type doors
- 1" high-temperature mineral fiber sheet insulation on top, back, sides and bottom

### INTERIOR CONSTRUCTION

- 20" x 20" x 9" (508mm x 508mm x 229mm) oven compartment interior
- Aluminized steel baking compartment liner
- Cordierite oven deck
- No. 16 gauge aluminized steel heater shelf assemblies

#### OPERATION

- 3 tubular type heaters (208 or 240 VAC) 3750 total watts
- Thermostat actuated contactor heater control
- Solid state digital display control with temperature range of 150° to 500°F (66° to 260°C) and a maximum 12 hour timer with audible alarm

### STANDARD FEATURES

- Two year parts and one year labor warranty
- Five year limited oven door warranty\*






<sup>\*</sup> For all international markets, contact your local distributor.



# **MODEL 1415**



### APPROVAL/STAMP

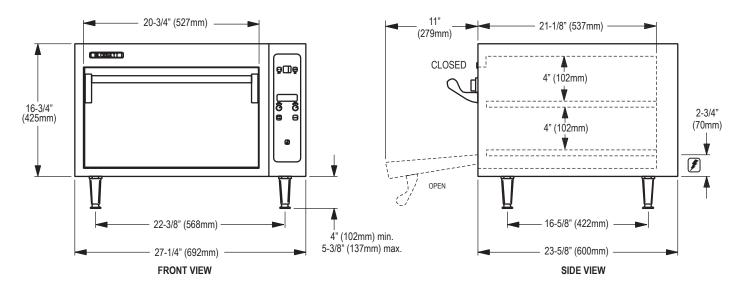

### **DIMENSIONS:**

Number of sections: 1 2
Number of controls: 1 2
Number of compartments: 1 2

Size of compartments: 20" x 20" x 9" (508mm x 508mm x 229mm)

Clearance below oven: 4" (102mm) minimum

Counter space: 27-3/8" x 23-11/16" (695mm x 602mm)

Minimum entry clearance: 23" (548mm)

### POWER SUPPLY:

V.A.C.	Hz	Phase	kW	Amperes (L1-L2-L3)
208	60	1	3.75	18-0-18
208	60	3	3.75	11-11-11
220-240	60	1	3.75	17-0-17
220-240	60	3	3.75	10-10-10
220-240	50	1	3.75	17-0-17

# **MINIMUM ENTRY CLEARANCE:**

Uncrated 17" (431 mm) Crated 26" (660 mm)

# SHIPPING INFORMATION:

Approx. weight:

Single: 270 lbs. (122 kg)
Double: 540 lbs. (245 kg)

Crate size: 33" x 36" x 35"

(838 mm x 914 mm x 889 mm)

NOTE: The company reserves the right to make substitutions of components without prior notice.