

KOOL-IT

Signature

KST-27-1

SINGLE DOOR SANDWICH PREP TABLE

All-stainless steel construction, heavy-duty refrigeration system that delivers reliable and efficient cold storage with superior quality.



KEY FEATURES



• Eco-Friendly Refrigerant

Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA, California & Canada refrigerant & energy standards.



• Digital Control

Digital temperature controls and display with automatic defrost system.



• High Power Reliable Refrigeration System

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



• Durable, Self-contained System

Stainless steel exterior and interior, coated evaporator coil and oversized bottom mount compressor



Signature **40/80 Warranty**
40 months parts and labor
80 months on compressor (part only)



3560 NW 56th Street
Fort Lauderdale, FL, United States 33309
Telephone: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100


5659 Royalmount Ave.
Montreal, QC, Canada H4P 2P9
Telephone: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com / mvpgroupcorp.com



KST-27-1

SINGLE DOOR SANDWICH PREP TABLE

PRODUCT VIEWS

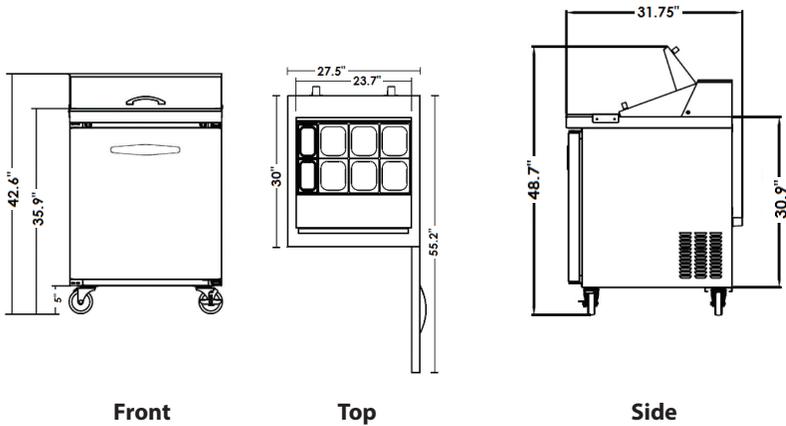

TECHNICAL SPECIFICATIONS

Exterior Dimensions		Interior Dimensions	
W:	27.5" (699 mm)	W:	22.6" (574 mm)
D:	31.75" (807 mm)	D:	20.2" (513 mm)
H:	42.6" (1082 mm)	H:	21" (533 mm)

Interior Capacity

7 Cu Ft
198 L

Doors	Material	Shelves	Pan Capacity (Type Included)
1	Stainless Steel	1	2 (1/9 x 4") 6 (1/6 x 4")

Exterior Material	Stainless Steel
Interior Material	Stainless Steel

ADDITIONAL FEATURES



Removable, easy to clean 9.5" deep cutting board



Equipped with 8 4" polycarbonate food pans (can accommodate 6" pans)



Heavy-duty 5" castors (2 with brakes)



Self-closing door
Reversible door swing (part KB-5246 required)



Foamed-in-place high-density CFC-free polyurethane insulation



Tight-sealing magnetic vinyl gaskets



1" thick insulated lid

REFRIGERATION PERFORMANCE

Refrigerant	R290
Compressor Power	1/4 HP
Thermostat default setting	33°F (0.5°C) to 39°F (4°C)

ELECTRICAL

Power Supply	Amps
115V/60Hz	4.0A
Plug Type	NEMA 5-15P

LOGISTICS

Unit Weight	Shipping Dimensions	
157 lb (71 kg)	W:	28.9" (734 mm)
Shipping Weight	D:	34.1" (866 mm)
187 lb (85 kg)	H:	42.3" (1074 mm)