



Available in Black or White finish

MODEL

KGL-CH-(36-48-60)-S

CASE HOLDS 36F TO 40F | FORCED AIR REFRIGERATION.
FRONT LOADING | TEMPERED GLASS



Intertek



Intertek



AUTODESK[®]
REVIT[®]


SELF CONTAINED	Model	Width (inches)	Capacity Cu.ft	Electrical			NEMA Plug	Weight lbs		Crate Size (inches)		
				Compressor		Total Amps		Net Weight	Ship Weight	L"	W"	H"
				H.P	Amps							
	KGL-CH-36	35,87	4,93	1/2	8,9	17	5-20P	375	452	41.37	41.14	54.92
	KGL-CH-48	48,66	6,89	3/4	16	24	Hard-wired	452	536	54.17	41.14	54.92
	KGL-CH-60	59,69	8,58	3/4	16	24	Hard-wired	496	585	65.19	41.14	54.92

STANDARD FEATURES

- CFC free injected foam insulation
- Silver colored PVC coated steel front panel
- PVC coated steel gray interior
- Wood laminate covered end panels
- LED lighting in canopy and under all shelves
- Temperature and defrost regulated by a digital controller
- Removable condensate evaporating pan for easy cleaning
- Slide out condensing unit on self-contained units

OPTIONAL FEATURES

- Stainless steel front panel
- Stainless steel base and / or interior
- Mirrored side glass
- Front panel bumper protector
- Acrylic product partitions
- Shelf price tag moldings
- Casters add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

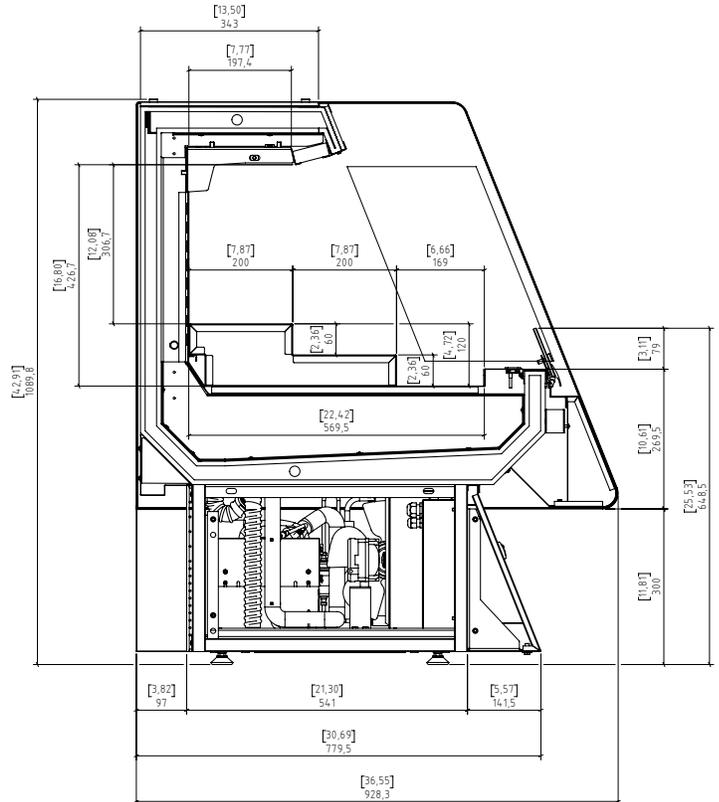

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient)

Hydra - Kool is a registered trademark of MVP Group Corp.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)