UL

Drive foodservice profits with display cases from Alto-Shaam. LED lighting and mirrored back doors enhance food appearance and boost impulse sales. To not only look but taste great, food is held at optimal, precise temperatures with Halo Heat® technology and top ceramic heaters. Multiple access points and a removable back work shelf makes unloading and loading food effortless for employees. Reduce labor and cleaning time with removable back doors and side panels, and a lifting glass front.



Standard features

- Fanless, waterless Halo Heat technology
- Overhead LED lighting
- Adjustable thermostats 1-10 per heat zone for top and bottom heat
- Ceramic top heaters
- Operator-side work shelf and cutting board
- Sliding back doors with mirrored glass
- Tempered glass front with self-supported lifting mechanism
- Removable back doors and side glass panels
- One set of 4" (102mm) legs with rubber feet
- Three (3) pan zones to hold standard pan sizes (GN)
- Two (2) heat zones
- Two (2) heat-on indicator lights
- Four (4) long pan dividers (1002584)
- Three (3) short pan dividers (1002585)
- Nine [9] short pan dividers [11318]

a ig ban
FD3(SYS)-48

With Stationary Base

Configuration

- ☐ ED3-48 with 4-inch legs and rubber feet (standard)
- ☐ ED3(SYS)-48 with stationary base

Electrical

- □ 208V, 50/60 Hz, 1PH
- □ 240V, 50/60 Hz, 1PH

Pan* Capacity									
Pan Size	Pan Dimensions	Qty.							
Full-Size & One-Third**:	12" x 20" x 2-1/2" [GN 1/1] 12" x 6" x 2-1/2" [GN 1/3]	3 3							
Half-Size & One-Third**:	12" x 10" x 2-1/2" [GN 1/2] 12" x 6" x 2-1/2" [GN 1/3]	6 3							
Full-Size Sheet Pans:	18" x 26" x 1"	2							
Max. Capacity/Volume:	48 lbs (22 kg) 30 qts (3	36 L)							
·									

- Pans are not included with display case
- ** Will also accept 4" (100mm) deep pans.

Options and Accessories

Panel Color (select one)

- ☐ Black, standard
- ☐ Stainless steel, optional

End Glass (select one)

- ☐ Clear glass, standard
- ☐ Solar bronze glass, optional (5011353)

Additional

- ☐ Temperature gauge [GU-48153]
- ☐ Right-mounted scale platform (5001307)
- ☐ Left-mounted scale platform (5001308)
- ☐ Work shelf with gravy lane [5005638]
- ☐ Pan insert [4" deep] [1001990]
- ☐ 1/3 Pan cover-up bar [1008014]
- ☐ Sheet pan divider bar package (5002802)

Extended warranty

☐ One-year warranty extension













DIMENSIONS

ED3-48 with Legs



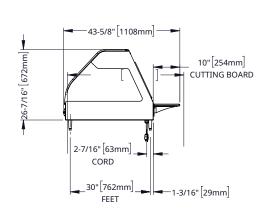



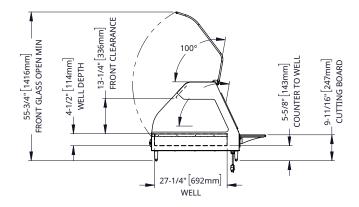

Model

ED3-48 Feet

Exterior (H x W x D)

30-3/16" x 48-5/16" x 43-5/8" [767mm x 1227mm x 1108mm]

Ship Dimensions (H x W x D)*

45" x 52" x 45" [1143mm x 1321mm x 1143mm]

Well (W x L x D)

27-1/4" x 45-5/16" x 4-1/2" (692mm x 1151mm x 114mm)

Net Weight

297 lb (135 kg)

Ship Weight*


372 lb [169 kg]

*Domestic ground shipping information. Contact factory for export weight and dimensions.



DIMENSIONS

ED3(SYS)-48 with Stationary Base

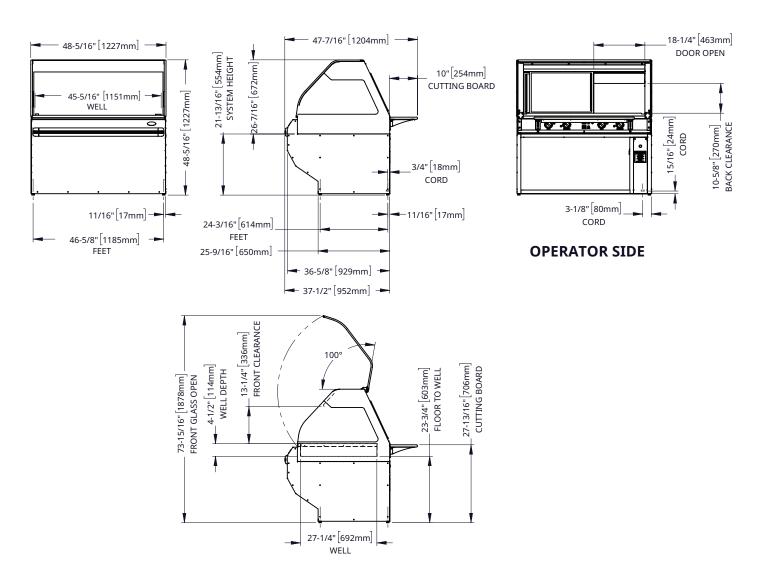

Model Exterior (H x W x D)

ED3-48 48-5/16" x 48-5/16" x 47-7/16" [1227mm x 1227mm x 1204mm]
SYS **Ship Dimensions (H x W x D)***

65" x 60" x 55" (1651mm x 1524mm x 1397mm)

Well (W x L x D)

27-1/4" x 45-5/16" x 4-1/2" [692mm x 1151mm x 114mm]

Net Weight 450 lb (204 kg)


Ship Weight*

500 lb (227 kg)

*Domestic ground shipping information. Contact factory for export weight and dimensions.



ED3 Pan Configurations

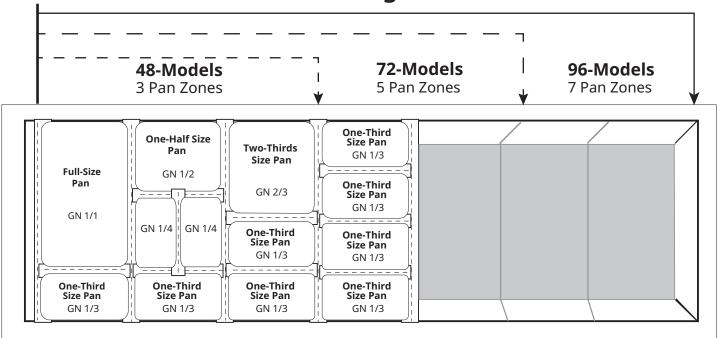



Installation Requirements

ED3-48

- The display case must be installed level.
- The display case must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Do not install a heated display case near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.



ED3515-48				Triii iii TiGiTi		THIIIIITIGITI					
	208	1	50/60	14	11.8	15A	2.45	12/3; 6ft; NEMA 6-20 😯			
	240	1	50/60	14	13.6	17A	3.26	12/3; 6ft; NEMA 6-20 👽			
*Recommended minimum conductor sized at 90°C and ambient 30°C.											

AWG*

Electrical connections must meet all applicable federal, state, and local codes.

kW

Breaker

Connection