

KOOL-IT

Signature

KBSF-1

SINGLE SOLID DOOR BOTTOM MOUNT FREEZER

All-stainless steel construction, heavy-duty refrigeration system that delivers reliable and efficient cold storage with superior quality.



Signature **40/80 Warranty**
40 months parts and labor
80 months on compressor (part only)

KEY FEATURES



• **Eco-Friendly Refrigerant**
Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA, California & Canada refrigerant & energy standards.



• **Digital Control**
Digital temperature controls and display with automatic defrost system.



• **High Power Reliable Refrigeration System**
Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



• **Standard LED Lighting System**
Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility.



• **Durable, Self-contained System**
Stainless steel exterior and interior, coated evaporator coil and oversized bottom mount compressor



3560 NW 56th Street
Fort Lauderdale, FL, United States 33309
Telephone: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100


5659 Royalmount Ave.
Montreal, QC, Canada H4P 2P9
Telephone: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com / mvpgroupcorp.com



KBSF-1

SINGLE SOLID DOOR BOTTOM MOUNT FREEZER

PRODUCT VIEWS

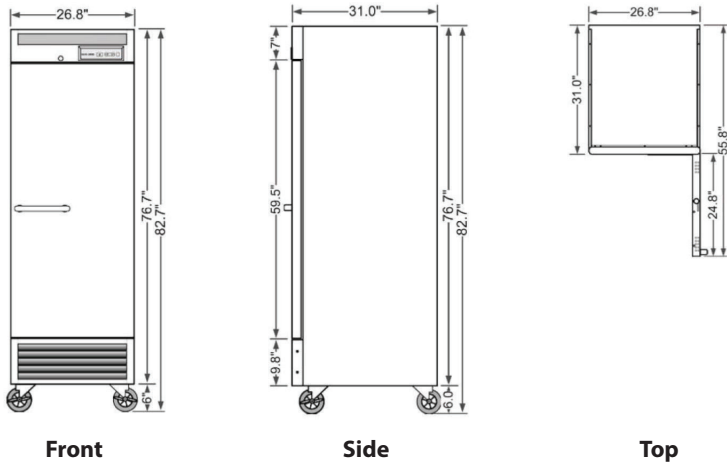

TECHNICAL SPECIFICATIONS

Exterior Dimensions		Interior Dimensions	
W:	26.8" (681 mm)	W:	22.8" (572 mm)
D:	32.75" (832 mm)	D:	24.3" (613 mm)
H:	82.7" (2105 mm)	H:	53.8" (1366 mm)
Interior Capacity			
18.9 Cu Ft 535 L			
Doors	Material	Shelves	
1	Stainless Steel	3	
Exterior Material		Stainless Steel	
Interior Material		Stainless Steel	

ADDITIONAL FEATURES



Door Lock & Key set for security



Heavy-duty 4" castors (2 with brakes)



Self-closing doors with stay open feature
Reversible door swing (part KB-BLHK required)



Open door alert beeps when door has been open
for 3 minutes



Foamed-in-place high-density CFC-free
polyurethane insulation



Tight-sealing magnetic vinyl gaskets

REFRIGERATION PERFORMANCE

Refrigerant	
R290	
Compressor Power	
1/2 HP	
Thermostat default setting	5°F (-15°C) to -9°F (-23°C)

ELECTRICAL

Power Supply	Amps	Lighting
115V/60Hz	5.6A	LED Interior
Plug Type		
NEMA 5-15P		

LOGISTICS

Shipping Weight
328 lb (149 kg)