

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

# **BB BAR EQUIPMENT - BACK BAR REFRIGERATOR**

BB72HC Solid Door Food Rated Pass-Thru Hydrocarbon Series

MODEL: BB72HC-1-F-PT-B-27 BB72HC-1-F-PT-S-27

# 3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

BB72HC-1-F-PT-B-27

### **CABINET CONSTRUCTION**

- Black or stainless steel exterior
- Stainless steel interior
- Full electronic control
- Galvanized sub-top standard
- Two (2) epoxy coated shelves per section, standard
- Self-closing doors
- Stay-open feature & lock standard
- Magnetic door gaskets provide positive door sealing
- LED lighting
- Certified for open food product
- Balanced, forced air refrigeration system provides rapid chilling of product
- Maintains product temperature between 36°F and 38°F

## **OPTIONS & ACCESSORIES**

- Wine model (40°-60° models)
- Wine shelf divider
- 3" or 6" casters
- ☐ Glass or sliding glass doors
- Remote option

#### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	BB72HC-1-PT-B-27	BB72HC-1-PT-S-27
EXTERNAL DIMENSIONAL DATA		
Width Overall	72"	72"
Depth Overall with Handles	27 3/8"	27 3/8"
Height Overall	34"	34"
Number of Doors	6	6
Depth with Door Open 90°	63 3/4"	63 3/4"
Door Opening (inches)	17 7/8" x 29 1/4"	17 7/8" x 29 1/4"
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	22.1	22.1
Internal Width Overall (in)	60 1/4"	60 1/4"
Internal Depth Overall (in)	19 3/8"	19 3/8"
Internal Height Overall—(in)	28"	28"
Number of Shelves	6	6
Number of Kegs	3	3
ELECTRICAL DATA		
Full Load Amperes 115/60/1	3.1	3.1
REFRIGERATION DATA		
Horsepower	1/3	1/3
Capacity (BTU/Hr)*	1942	1942
WEIGHT DATA		
Gross Weight (Crated lbs)	375 lbs	375 lbs
Height - Crated	43"	43"
Width - Crated	75"	75"
Depth - Crated	27"	27"

# **Bar Equipment-Back Bar Refrigerator** Solid Door Pass-Thru

Model: BB72HC-1-PT-B, BB72HC-1-F-PT-S-27

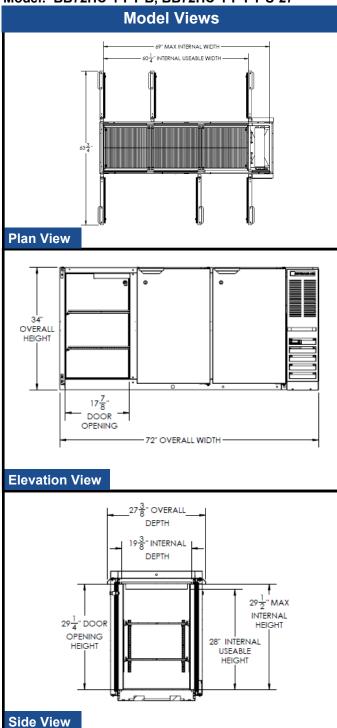

#### **ELECTRICAL CONNECTION**

















115/60/1

Units pre-wired at factory and include 8' long cord and plug set.



