HSM Series Heated Shelf Merchandiser

Featuring exclusive Halo Heat* fanless technology, Alto-Shaam heated shelf merchandisers provide precise, even heating for the highest quality food and lowest cost of ownership.

The HSM holds a variety of grab-and-go products, including rotisserie chickens, pizza, sandwiches, and more. Improve store profits with hot, ready-to-eat meals. Convenient, fresh meals are displayed in an aesthetically pleasing, customizable merchandiser.

Experience better quality food with gentle, even and precise Halo Heat[®] fanless technology to keep food from drying out.

Flexibility to control individual shelf temperatures allows you to hold a variety of products at the proper temperature.

Boost impulse sales with LED-lighted shelves, backlit interchangeable graphics, and pricing rails.

Simple operation and easy cleaning keeps delis and grab-and-go areas operating smoothly.

Lowest cost of ownership on the market – cost savings of 50% compared to traditional models.

Easy-to-load shelves – pass-through option available for added convenience.

Made in the USA with a commitment to quality. Alto-Shaam is ISO 9001:2015-certified.

Standard Features

- · Adjustable thermostat with a heat-on indicator light
- · Latched access panel on the front of the merchandiser
- Four (4) 3" (76mm) casters

Capacity



HSM-24/5S: Five (5) 20-7/8" (530mm) width shelves, four (4) chicken boats with dome cover per shelf.

HSM-36/5S: Five (5) 32-7/8" (835mm) width shelves, six (6) chicken boats with dome cover per shelf.

HSM-48/5S: Five (5) 44-7/8" (1140mm) width shelves, ten (10) chicken boats with dome cover per shelf.



HSM-36/5S: 80 lb (36 kg) 16 lb (7 kg) per shelf **HSM-36/5S:** 120 lb (54 kg) 24 lb (11 kg) per shelf **HSM-48/5S:** 200 lb (91 kg) 40 lb (18 kg) per shelf





Configurations (select one)

Model

- ☐ HSM-24/5S
- ☐ HSM-36/5S (not shown)
- ☐ HSM-48/5S

Electrical

□ 208-240V, 1PH □ 230V, 1 PH

Style

☐ Reach-in ☐ Pass-through

Door Options

- ☐ None (reach-in models only)
- ☐ Rear slide (pass-through models only)
- $\hfill\square$ Rear swing (pass-through models only)
- ☐ Front swing (reach-in and pass-through models)

Casters or Legs

- □ 3" (76mm) casters for floor standing application (Standard)
- ☐ 6" (152mm) feet for floor standing application (FE-27153)

Accessories (select all that apply)

Unit ships without graphics unless selected

- ☐ Signage panel, POP Display
- ☐ Signage panel, shelf Rotisserie Chicken
- ☐ Signage panel, shelf Hot Sandwiches
- ☐ Signage panel, shelf Barbecue Ribs
- ☐ Signage panel, shelf Hot & Tasty
- ☐ Signage panel, shelf Grab & Go
- ☐ Signage panel, shelf Hot & Fresh

Shelf insert for magnetic signage panels Magnetic signage panels to be provided by customer.

- HSM-24 ☐ Stainless Steel (1027304) ☐ Black (PE-46057)
- HSM-36 ☐ Stainless Steel (1027305) ☐ Black (PE-46058)
- HSM-48 ☐ Stainless Steel (1027306) ☐ Black (PE-46059)


Wire shelf

☐ HSM-24 (SH-46066) ☐ HSM-36 (SH-46067) ☐ HSM-48 (SH-46068)

HSM Series Heated Shelf Merchandiser



Dimension Drawings

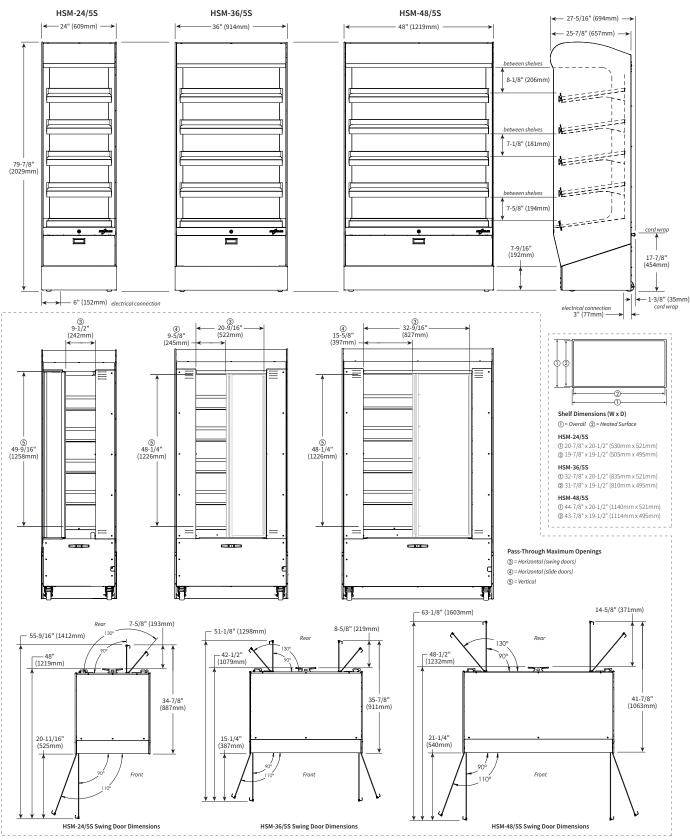

HSM Series Heated Shelf Merchandiser



Specifications



Model	Exterior (H x W x D)	Net Weight
HSM-24/5S	79-7/8" x 24" x 27-5/16" (2029mm x 609mm x 694mm)	406 lb (184 kg)
HSM-36/5S	79-7/8" x 36" x 27-5/16" (2029mm x 914mm x 694mm)	496 lb (225 kg)
HSM-48/5S	79-7/8" x 48" x 27-5/16" (2029mm x 1219mm x 694mm)	563 lb (255 kg)

	Ship Dimensions (L x W x H)*	Ship Weight*
HSM-24/5S	36" x 36" x 89" (914mm x 914mm x 2261mm)	550 lb (249 kg)
HSM-36/5S	56" x 45" x 89" (1422mm x 1143mm x 2261mm)	652 lb (296 kg)
HSM-48/5S	56" x 63" x 89" (1422mm x 1600mm x 2261mm)	772 lb (350 kg)

*Domestic ground shipping information. Contact factory for export weight and dimensions.



• Merchandiser must be installed level.

- Merchandiser must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- In order to maintain NSF standards, floor models must be equipped with casters or 6" (152mm) legs.



Rear: 4" (102mm)

Recommended: 18" (457mm) for service access. Charges in connection with inadequate service access is not covered under warranty.



CONTACT US

	V	PII	пи	A	KVV	Plug Configuration
HSM-24/5S	208 – 240	1	60	10.8 - 12.5	2.2 - 3.0	NEMA 6-20P (20A, 250V)
	230	1	50/60	11.5	2.9	CEE 7/7 CH2-16P BS 1363
HSM-36/5S	208 – 240 230	1	60 50/60	14.4 – 16.7 15.0	3.0 – 4.0 3.5	cord, no plug CEE 7/7 CH2-16P BS 1363
HSM-48/5S	208 – 240 230	1 1	60 50/60	19.0 – 21.9 20.0	4.0 – 5.3 4.6	cord, no plug cord, no plug









