

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

BB BAR EQUIPMENT - BACK BAR REFRIGERATOR

BB48HC Sliding Glass Door, Food Rated, Pass-Thru & Stainless Steel Top Hydrocarbon Series

MODELS: BB48HC-1-GS-F-PT-B-27 BB48HC-1-GS-F-PT-S-27

HAVERAGE AIR

BB48HC-1-GS-F-PT-S-27

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

- Exterior black or stainless steel
- Stainless steel interior
- Full electronic control
- Stainless steel top
- Two (2) epoxy coated shelves per section, standard
- Self-closing sliding glass doors have black frame regardless of finish
- Stay-open feature
- Magnetic door gaskets provide positive door sealing
- LED lighting
- Certified for open food product
- Balanced, forced air refrigeration system provides rapid chilling of product
- Maintains product temperature between 36°F and 38°F

OPTIONS & ACCESSORIES

- ☐ Wine model (40°-60° models)
- ☐ Wine shelf divider
- ☐ 3" or 6" casters
- ☐ Glass or solid doors
- Remote option

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil



















MODEL	BB48HC-1-GS-F-PT-B-27	BB48HC-1-GS-F-PT-S-27	
EXTERNAL DIMENSIONAL DATA			
Width Overall	48"	48"	
Depth Overall with Handles	25 1/2"	25 1/2"	
Height Overall	36"	36"	
Number of Doors	4	4	
Door Opening (in)	-	-	
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	13.6	13.6	
Internal Width Overall (in)	36 1/4"	36 1/4"	
Internal Depth Overall (in)	18"	18"	
Internal Height Overall (in)	28"	28"	
Number of Shelves	4	4	
Number of Kegs	2	2	
ELECTRICAL DATA			
Full Load Amperes 115/60/1	3.1	3.1	
REFRIGERATION DATA			
Horsepower	1/3	1/3	
Capacity (BTU/Hr)*	1942	1942	
WEIGHT DATA			
Gross Weight (Crated lbs)	316 lbs	316 lbs	
Height - Crated	43"	43"	
Width - Crated	51"	51"	
Depth - Crated	27"	27"	

Bar Equipment—Sliding Glass Door Food Rated Pass-Thru with Stainless Steel Top Models: BB48HC-1-GS-F-PT-B-27, BB48HC-1-GS-F-PT-S-27

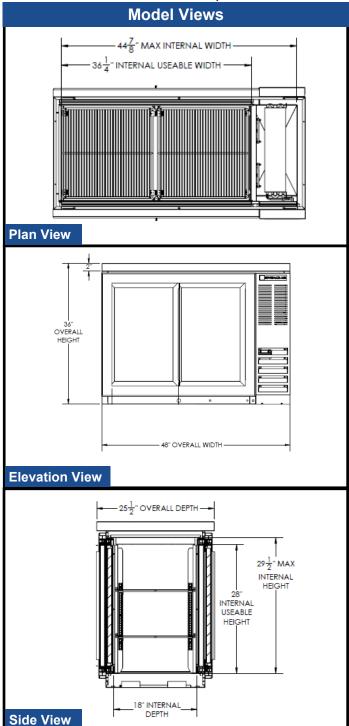



















Units pre-wired at factory and include 8' long cord and plug set.



