

Fusion

Product Specifications

ITEM NO: _____
PROJECT: _____
DATE: _____

Non-Refrigerated Service Case

□ GMDSV4D

Lengths include 1-1/8" end panels
51"L x 43"D x 51-5/8"H



MODEL SHOWN: GMDSV4D

STANDARD FEATURES

- Flat upper front panel
- LED 4000K top & shelf lights
- One year parts & labor warranty
- Solid shelf, lighted
- Vertical, UV bonded lift-up front glass w/o lock

Features	Standard	Options
EXTERIOR COLOR	□ Laminated (non-premium) Confirm pattern/grain direction	□ Laminated (premium) Confirm pattern/grain direction □ Stainless steel
INTERIOR COLOR	□ Black	□ Stainless steel □ White
LOWER FRONT PANEL COLOR	□ Painted - Black	□ Stainless steel
REAR EXTERIOR	□ Stainless steel	□ Painted - Black □ Painted - White
TRIM COLOR	□ Black	□ Silver
BASE	□ Casters w/ levelers	□ 6"H legs □ Rail system for shims
END PANEL LEFT	□ Full end panel w/stainless mirrored interior	□ Cutaway w/ glass □ No end panel (for same case to case connect)
END PANEL RIGHT	□ Full end panel w/stainless mirrored interior	□ Cutaway w/ glass □ No end panel (for same case to case connect)
UPPER REAR	□ Clear glass rear sliding doors w/o lock	□ Reflective glass rear sliding doors w/o lock
ELECTRICAL CONNECT	□ 12" straight blade power cord	□ 12" locking power cord □ Electrical leads (non-refrigerated)
MISCELLANEOUS		□ Front glass lock □ Rear door lock □ Scale stand w/receptacle (requires separate circuit) □ Second year parts & labor warranty
ACCESSORIES		□ 2"H Full depth display risers (n/a w/shelf) □ Angled display steps (n/a w/shelf) □ Price tag molding (matches interior color) □ Rear wrapping board, white Sanalite®


Product Specifications

Zone	Intended Product To Be Displayed
------	----------------------------------


Warmest Avg Prod Temp ° F	
1	60
2	60
3	60
4	60
5	60
6	60
7	60
8	60
9	60
10	60
11	60
12	60
13	60
14	60
15	60
16	60
17	60
18	60
19	60
20	60
21	60
22	60
23	60
24	60
25	60
26	60
27	60
28	60
29	60
30	60
31	60
32	60
33	60
34	60
35	60
36	60
37	60
38	60
39	60
40	60
41	60
42	60
43	60
44	60
45	60
46	60
47	60
48	60
49	60
50	60
51	60
52	60
53	60
54	60
55	60
56	60
57	60
58	60
59	60
60	60
61	60
62	60
63	60
64	60
65	60
66	60
67	60
68	60
69	60
70	60
71	60
72	60
73	60
74	60
75	60
76	60
77	60
78	60
79	60
80	60
81	60
82	60
83	60
84	60
85	60
86	60
87	60
88	60
89	60
90	60
91	60
92	60
93	60
94	60
95	60
96	60
97	60
98	60
99	60
100	60


Ambient


PLAN VIEW

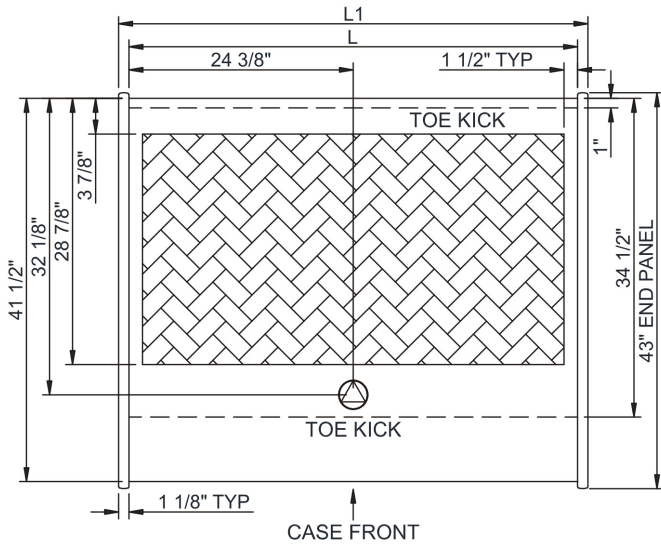

SIDE VIEW

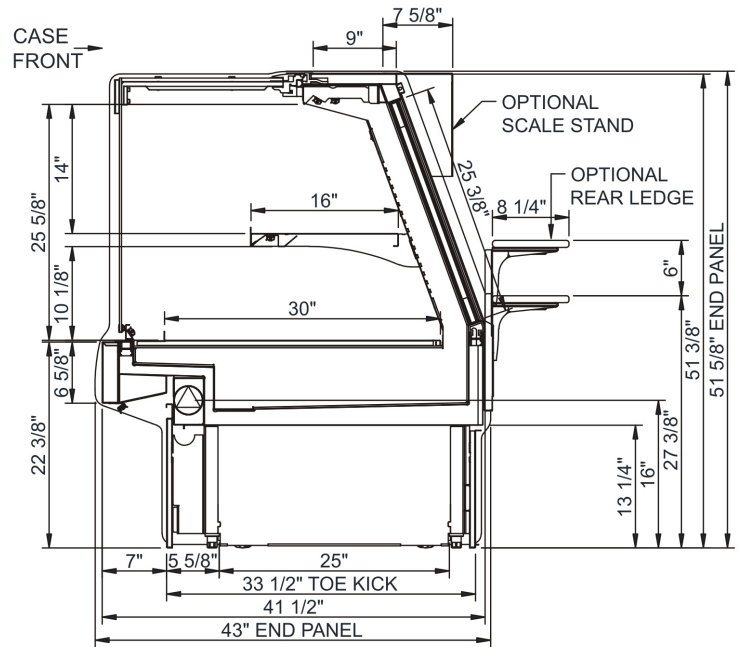

 **ELECTRICAL JUNCTION BOX**
(SUPPLIED WITH 6" LEADS OR POWER CORD).

 **LOCATION OF DRAIN TUBE FOR REMOTE REF.**
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

 REFRIGERATION LINE CONNECTION.

 REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

 SELF-CONTAINED CASE SERVICE ACCESS AREA.

 DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
GMDSV4D	48.75	51.00	.00	Ambient	Circuit #1	110-120	1	60	0.70	30	2+G	5-15P or L5-15P	N/A	N/A	N/A	850

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models	ETL Listed to UL 65 ETL Sanitation to NSF 2
------------	--



Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 45" minimum door entry clearance required (without shipping skid).
- 3) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4".

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.