

# KOOL-IT

## Signature

# KBSR-2

## DOUBLE SOLID DOOR BOTTOM MOUNT REFRIGERATOR

All-stainless steel construction, heavy-duty refrigeration system that delivers reliable and efficient cold storage with superior quality.



### KEY FEATURES



#### • Eco-Friendly Refrigerant

Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA, California & Canada refrigerant & energy standards.



#### • Digital Control

Digital temperature controls and display with automatic defrost system.



#### • High Power Reliable Refrigeration System

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



#### • Standard LED Lighting System

Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility.



#### • Durable, Self-contained System

Stainless steel exterior and interior, coated evaporator coil and oversized bottom mount compressor



*Signature* **40/80 Warranty**  
40 months parts and labor  
80 months on compressor (part only)



3560 NW 56th Street  
Fort Lauderdale, FL, United States 33309  
Telephone: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100


5659 Royalmount Ave.  
Montreal, QC, Canada H4P 2P9  
Telephone: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832  
sales@mvpgroupcorp.com / mvpgroupcorp.com



# KBSR-2

## DOUBLE SOLID DOOR BOTTOM MOUNT REFRIGERATOR

### PRODUCT VIEWS

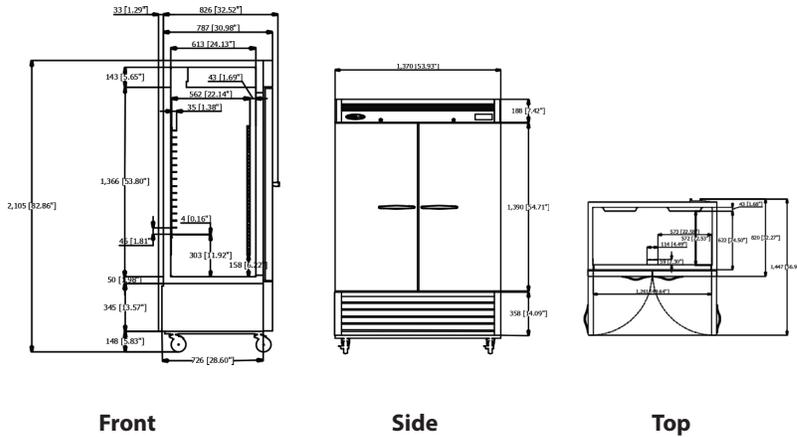

### TECHNICAL SPECIFICATIONS

Exterior Dimensions		Interior Dimensions	
<b>W:</b>	53.98" (1370 mm)	<b>W:</b>	50" (1261 mm)
<b>D:</b>	31" (787 mm)	<b>D:</b>	24.3" (613 mm)
<b>H:</b>	82.7" (2105 mm)	<b>H:</b>	53.8" (1366 mm)
<b>Interior Capacity</b>			
42.8 Cu Ft 1212 L			
Doors	Material	Shelves	
2	Stainless Steel	6	
<b>Exterior Material</b>		Stainless Steel	
<b>Interior Material</b>		Stainless Steel	

### ADDITIONAL FEATURES



Door Lock & Key set for security



Heavy-duty 5" castors (2 with brakes)



Self-closing doors with stay open feature



Open door alert beeps when door has been open for 3 minutes



Foamed-in-place high-density CFC-free polyurethane insulation



Tight-sealing magnetic vinyl gaskets

### REFRIGERATION PERFORMANCE

<b>Refrigerant</b>	R290
<b>Compressor Power</b>	1/4 HP
<b>Thermostat default setting</b>	33°F (0.5°C) to 39°F (4°C)

### ELECTRICAL

Power Supply	Amps	Lighting
115V/60Hz	2.4A	LED Interior
<b>Plug Type</b>		
NEMA 5-15P		

### LOGISTICS

Shipping Weight	Trailer Load
448 lb (203 kg)	40' HC: 20