

#### IR-6-G36T-E Shown with optional casters

MODEL NUMBERS IR-12-E IR-6-G36T-E



High performance 5.3 KW element provides even heating throughout the oven.



Splatter screen protects the element from spills.



9" (229) diameter round plate elements with easy to clean surface.

### STANDARD OVEN

- Baffle above the element distributes heat flow to provide even cooking temperatures throughout the 5.3 KW oven. Splatter screen protects the element from spills.
- Chef depth oven interior accommodates standard 18" x 26" (457 x 660 mm) sheet pans front-to-back and side-by-side.
- Oven is 261/2" w x 26" d x 14" h (673 x 660 x 356 mm)
- Heavy duty thermostat with temperature range from 150°F to 500°F (65°C to 260°C)
- Porcelainized sides, rear, deck and inner door liner.
- Side oven controls are protected from heat in an insulated side compartment
- Stamped inner door liner provides extra strength while improving heat retention.
- One chrome oven rack is included.

# **ROUND PLATE ELEMENTS**

- Plates are 9" (229) diameter for maximum pan contact
- Solid top prevents spills from entering unit making clean-up easy.
- 2.6 KW round plate elements with easy-to-clean flat surface.
- Infinite heat controls for maximum cooking flexibility

## **GRIDDLE TOP**

- Thick highly polished 3/4" (19 mm) steel plate with thermostat controls.
- 21" (533 mm) plate depth.
- Even heating elements across the griddle section provide consistent temperature across the plate.
- 4" (102 mm) wide grease trough and removable grease can for easy cleaning.
- Large griddle grease can is removable for easy cleaning.

### **CONVECTION OVEN**


- 5.3 KW convection oven with 1/2 hp blower motor cooks products quickly and evenly with less shrinkage.
- Convection oven interior dimensions 26-½" w 22-½" d x 14" h (673 x 572 x 356 mm).
- Three position switch for cooking or cool down. Fan shuts off automatically when door is open.
- Porcelainzed sides, rear, deck and door lining for easy cleaning.
- · Three chrome oven racks included.

# **EXTERIOR FEATURES**

- Stainless steel front, sides, backguard, shelf, landing ledge and kick plate.
- Welded and polished stainless steel seams.
- Large 4" (101 mm) stainless steel landing ledge
- 6" (152 mm) heavy duty legs with adjustable feet
- One year parts and labor warranty.





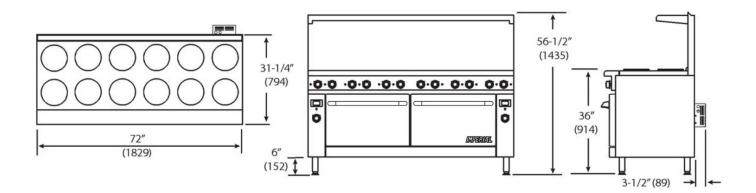

. 000

MODEL	ROUND ELEMENTS	GRIDDLE WIDTH	SHIP WEIGHT (KG) LBS	
IR-12-E	12-E 12 N/A		(514) 1135	
IR-6-G36T-E	6	36" (914)	(541) 1195	

Notes: Measurements in () are metric equivalents.

#### **ELECTRICAL REQUIREMENTS**

MODEL	TOTAL	KW	кw	VOLTS	VOLTS PHASE	VOLTS	DHV6E	AMPS	
WODEL	KW	'A'	'B'			J BOX 'A'	J BOX 'B'		
IR-12-E 41.8		20.9	20.9	208	3	67	67		
	41.8	20.9	20.9	240	3	58	58		
		20.9	20.9	480*	3	29	29		
IR-6-G36T-E	35.2	20.9	14.3	208	3	67	49		
		20.9	14.3	240	3	58	43		
		20.9	14.3	480*	3	29	22		

DIMENSIONS	CRATED DIMENSIONS
72" W x 31 ¼" D x 36" H**	74½" W x 39" D x 35" H
(1829 x 794 x 914 mm)	(1892 x 991 x 889 mm)

<sup>\*\*</sup> To cooktop

Contact Imperial for single phase options \*Additional charge



#### **CLEARANCE REQUIREMENTS**

For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2" (51 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

#### **OPTIONS AND ACCESSORIES**

- 6'' (152 mm) stainless steel stub back, in lieu of standard backguard
- 11" (279 mm) stainless steel stub back, in lieu of standard backguard
- Reinforcement channels for mounting cheesemelter or salamander
- Extra oven racks
- Chrome griddle top
- 6" (152 mm) casters
- 480 volts, 3 phase

