

KBSR-1 SINGLE SOLID DOOR BOTTOM MOUNT REFRIGERATOR

All-stainless steel construction, heavy-duty refrigeration system that delivers reliable and efficient cold storage with superior quality.



KEY FEATURES



• Eco-Friendly Refrigerant

Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GDP). Meets all USA, California & Canada refrigerant & energy standards.



Digital Control

Digital temperature controls and display with automatic defrost system.



• High Power Reliable Refrigeration System

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



Standard LED Lighting System

Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility.



• Durable, Self-contained System

Stainless steel exterior and interior, coated evaporator coil and oversized bottom mount compressor














3560 NW 56th Street Fort Lauderdale, FL, United States 33309 Telephone: 786.600.4687 / Toll Free: 844.218.8477 Fax: 786.661.4100 5659 Royalmount Ave. Montreal, QC, Canada H4P 2P9 Telephone: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832 sales@mvpgroupcorp.com / mvpgroupcorp.com



KBSR-1 SINGLE SOLID DOOR BOTTOM MOUNT REFRIGERATOR

PRODUCT VIEWS

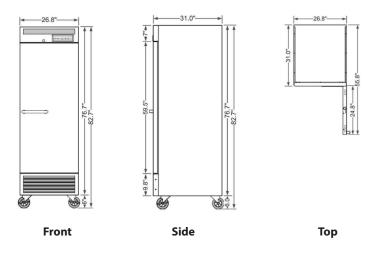

ADDITIONAL FEATURES



Door Lock & Key set for security



Heavy-duty 5" castors (2 with brakes)



Self-closing doors with stay open feature Reversible door swing (part KB-BLHK required)



Open door alert beeps when door has been open for 3 minutes



Foamed-in-place high-density CFC-free polyurethane insulation



Tight-sealing magnetic vinyl gaskets

TECHNICAL SPECIFICATIONS

| Exterior Dimensions | | Interior Dimensions | |
|---------------------|-----------------|---------------------|-----------------|
| W: | 26.8" (681 mm) | W: | 22.8" (572 mm) |
| D: | 31" (787 mm) | D: | 24.3" (613 mm) |
| H: | 82.7" (2105 mm) | H: | 53.8" (1366 mm) |

Interior Capacity

18.9 Cu Ft 535 L

| Doors | Material | Shelves | |
|-------------------|-----------------|-----------------|--|
| 1 | Stainless Steel | 3 | |
| Exterior Material | | Stainless Steel | |
| Interior Material | | Stainless Steel | |

REFRIGERATION PERFORMANCE

| Refrigerant | | |
|----------------------------|----------------------------|--|
| | R290 | |
| Compressor Power | | |
| 1/4 HP | | |
| Thermostat default setting | 33°F (0.5°C) to 39°F (4°C) | |

ELECTRICAL

| Power Supply | Amps | Lighting |
|--------------|------|--------------|
| 115V/60Hz | 2.0A | LED Interior |
| Plug Type | | |

NEMA 5-15P

LOGISTICS

| Shipping Weight |
|-----------------|
| 315 lb (143 kg) |