

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

UCR UNDERCOUNTER

UCR119AHC Undercounter Refrigerator Hydrocarbon Series MODELS: UCR119AHC

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty



CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors, (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on cam-lift hinges
- Easy door removal for service and cleaning
- Magnetic gasket attached to each door for positive seal
- Painted aluminum door handles
- 6" Casters, two (2) with brakes standard
- Eight (8) epoxy-coated steel wire shelves standard
- Field reversible doors
- Maintains product temperature between 36°F and 38°F

OPTIONS & ACCESSORIES

- Stainless steel back and grille
- Stainless steel interior
- □ Right or left hinged door
- □ Locks (solid doors only)
- □ Bun rack
- ☐ Wire shelf divider
- ☐ Thermometer digital or stem type dial
- □ 3" Casters or 6" legs
- Low profile casters
- Remote option

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	UCR119AHC
EXTERNAL DIMENSIONAL DATA	
Width Overall	119"
Depth Overall	32 7/8"
Height Overall with 6" Casters	34 1/2"
Number of Doors	4
Depth with Door Open 90°	55 1/8"
Door Opening (in)	21 5/8" x 23 5/8"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	40.12
Internal Width Overall (in)	115"
Internal Width Useable (in)	100"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	25"
Number of Shelves	8
ELECTRICAL DATA	
Full Load Amperes 115/60/1	5.0
REFRIGERATION DATA	
Horsepower	1/3
Capacity (BTU/Hr)*	2629
WEIGHT DATA	
Gross Weight (Crated lbs)	590 lbs
Height - Crated	40"
Width - Crated	122"
Depth - Crated	37"

Undercounter Refrigerators Models: UCR119AHC

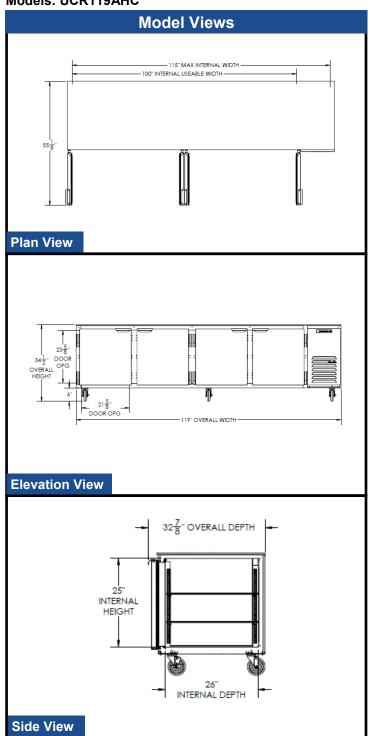

ELECTRICAL CONNECTION















Units pre-wired at factory and include 8' long cord and plug set.



