

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

MARKETMAX REFRIGERATOR

MMR45HC White Sliding Glass Door Model Hydrocarbon Series MODELS: MMR45HC-1-W



MMR45HC-1-W

OPTIONS & ACCESSORIES

- ☐ Black or stainless steel exterior option
- ☐ Black or stainless steel interior option
- Wine models available
- □ Wine thermometer
- ☐ Shelves black or white
- Stainless steel clips
- ☐ Flow track
- ☐ Gravity track
- □ Price tag molding
- ☐ 6" legs
- ☐ 3" or 6" Casters
- Door locks
- ☐ Custom signage & decals
- Remote option

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Standard cabinet exterior finish is heavy duty steel with a White baked on durable coating
- Heavy duty interior construction includes white coated steel walls
- Full electronic control
- Modern one piece grille
- Double pane lowE argon filled glass doors feature inside and outside panes that are tempered for added safety
- Sliding glass door models have black frames regardless of exterior finish
- Hold open feature is standard
- Ten (10) heavy duty epoxy coated wire shelves
- Brightly lighted sign panel
- LED lighting
- Maintains product temperatures between 36°F and 38°F

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	MMR45HC-1-W	
EXTERNAL DIMENSIONAL DATA		
Width Overall	52"	
Depth Overall	32 1/4"	
Height Overall	78"	
Number of Doors	2	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	44	
Internal Width Overall (in)	49"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	61 5/8"	
Internal Height Useable (in)	53	
Number of Shelves	10	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	5	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)*	2392	
WEIGHT DATA		
Gross Weight (Crated lbs)	555 lbs	
Height - Crated	85"	
Width - Crated	54"	
Depth - Crated	36"	

Glass Door Merchandisers - Sliding Door Models Models: MMR45HC-1-W

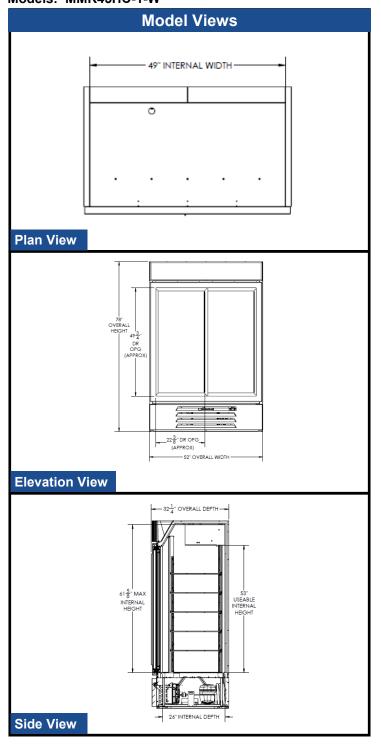

ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set.





















